

Download File PDF Reason 65 User Manual

#Jenny



Finally I get this ebook, thanks for all these I can get now!

#Rio



Cool! I'am really happy

#Markus Jensen



I did not think that this would work, my best friend showed me this website, and it does! I get my most wanted eBook

#Hun Tsu




wtf this great ebook for free?!

#Che Salsa



My friends are so mad that they do not know how I have all the high quality ebook which they do not!

#Diego Butler



so many fake sites. this is the first one which worked! Many thanks

EN Threading the Upper Thread

This is a simple operation but it is important to carry out correctly as by not doing so general sewing problems could result.

• Start by raising the needle to its highest point (1) and continue turning the handwheel* counterclockwise until the needle just slightly begins to descend. You must raise the presser foot to release the tension discs.

Note: For safety, it is strongly suggested you turn off the power before threading.

• Lift up the spool pin. Place the spool of thread on the holder with the thread coming off the spool from the back as shown and place appropriate spool holder next to the spool. For small thread spools, place small side of spool holder next to spool. (2)

• Draw thread from spool through the upper thread guide (3) and pulling thread through pre-tension spring as illustrated. (4)


• Thread tension module by leading thread down right channel. (5) During this process it is helpful to hold the thread between the spool and thread guide, as this will help to seat the thread between the tension discs.

• At the top of this movement pass thread from right to left through the dotted eye of the take-up lever and then downwards again. (6)

• Now pass the thread behind the horizontal thread guide, and then behind the thin wire needle clamp guide (7) and then down to the needle which should be threaded from front to back.

• Pull about 6-12 inches of thread under the presser foot to the rear beyond the needle eye. Trim thread to length with built-in thread cutter. (8)

* Never turn the handwheel away from you as this may cause the string to be disrupted. Always turn the handwheel counterclockwise (towards you).

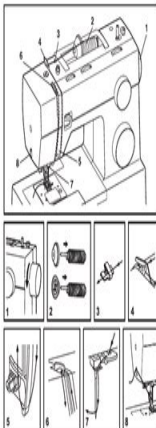

[Download PDF version of :](#)
Reason 65 User Manual